

SYMMETRY Product Specifications

80 Watts

SY2-M80W/LH4

The Symmetry range of small area modules are perfect for use in a wide variety of low power solar PV systems. Available in a range of sizes from 5 watts up to 160 watts, the Symmetry range uses mono-crystalline, weatherproof A grade solar cells in a robust aluminium frame.

Features:

■ 5 Busbar Cell

5 busbar solar cells improve the efficiency of modules, offer a better aesthetic appearance.

■ High Efficiency

High module conversion efficiency, through innovative manufacturing technology.

■ Low-Light Performance

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.

■ Severe Weather Resilience


Certified to withstand - wind load (2400Pa) and snow load (5400Pa).

■ Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance certified by TUV.

■ 0-+5W Positive Tolerance

Detailed information in Electrical Specifications.

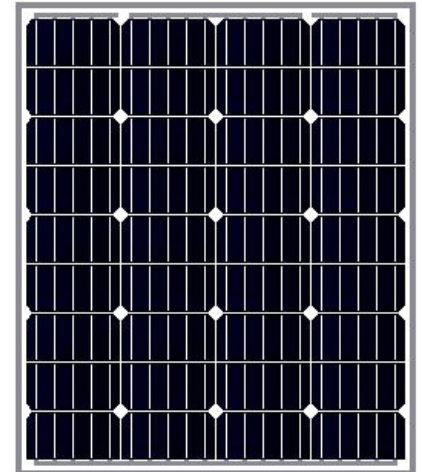

Electrical Specifications

Model Number	SY2-M80W/LH4
Peak Power – Pmax (W)	80
Max. Power Voltage – Vmp (V)	18.40
Max. Power Current – Imp (A)	4.35
Open Circuit Voltage – Voc (V)	22.54
Short Circuit Current – Isc (A)	4.58
Cell Efficiency (%)	18.19
Module Efficiency (%)	15.35
Max. System Voltage (V)	1000
Max. Series Fuse Rating (A)	10
Power Tolerance	0 ~ +3%
Pmax Temp. Coefficients (W/ °C)	-0.400%
Voc Temp. Coefficients (V/ °C)	-0.290%
Isc Temp. Coefficients (A/ °C)	+0.048%
NOCT Nominal Operating Cell Temp (°C)	45±2
Operating & Storage Temp. (°C)	-40 ~ +85
Standard Test Conditions (STC)	1.000w/m ² ; AM1.6; 25 +/-2 °C

SYMMETRY Product Specifications

80 Watts

SY2-M80W/LH4



Mechanical Specifications

Model Number	SY2-M80W/LH4
Cell Type	Mono-crystalline
No. of Cells	36 (4x9)
Module Dimensions	770 x 670 x 30mm
Weight	6.1kg
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction Box	IP65 Rated
Output Cable	2 x 0.9m long 2.5mm ² cable (UV resistant)
Connectors	2 x LH4 male & female connectors (30 amps)
Carton Dimensions	785 x 705 x 45mm

Product Standards

Product Performance	IEC61215
Product Safety	IEC61730
Warranty	Workmanship & materials; 5 years

Product Dimensions (mm)

